





Rolling scaffolds

- The floor or surface on which a rolling scaffold is moved must be
 - Within three degrees of level
 - Free from pits, holes, depressions, or obstructions
 - Able to withstand the superimposed point loading of the casters supporting the scaffold structure and the workers
- No worker is to remain on a rolling scaffold while moving it with his/her own efforts if the work platform height exceeds 1½ times the scaffold minimum base dimension.
- No worker is to remain on a rolling scaffold while it is being moved by other workers if the work platform height exceeds twice the minimum base dimension.
- At least two of the four wheels on rolling scaffolds must be the swivel caster type. The caster height-adjusting pins or screws must be installed so that the casters cannot fall out of the supporting legs of the scaffold.
- The wheels of rolling scaffolds must have locking devices.

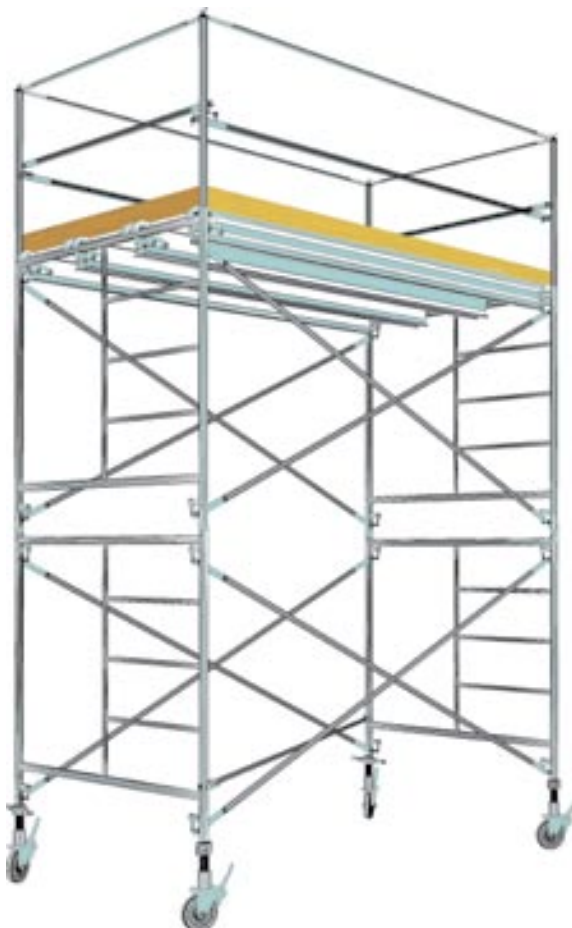

Rolling scaffold

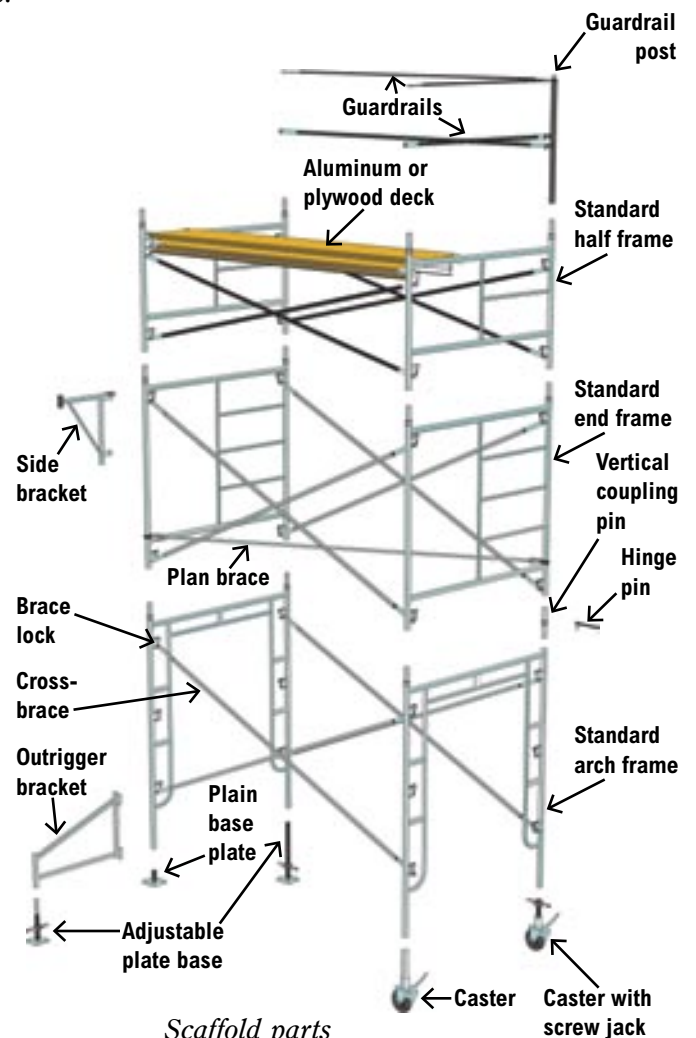

Scaffold parts

Project: _____ Address: _____

Employer: _____ Supervisor: _____

Date: _____ Time: _____ Shift: _____

Number in crew: _____ Number attending: _____

Other safety issues or suggestions made by crew members:

Record of those attending:

Name: (please print)	Signature:	Company:
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		
11.		
12.		
13.		
14.		
15.		

Manager's remarks: _____

Manager: _____ Supervisor: _____

(signature)

(signature)



WORKING TO MAKE A DIFFERENCE
worksafebc.com